



## DC/AC INVERTER

### INV222

In: 48V<sub>DC</sub>

Out: 230V<sub>AC</sub> (2.25kVA)

#### KEY FEATURES

- **1/4 x 19", 2U**
- **Excellent overall efficiency and high control rate**
- **"Hot plug-in" design with backplane connection**
- **High power density**
- **CAN-Bus interface**
- **Ability for parallel operation**
- **Temperature-controlled fan cooling**
- **Redundant synchronization bus**
- **Excellent sinusoidal output**
- **Input over/under voltage shutdown, overload and short circuit-proof**
- **Three-phase operation as option**

#### PRODUCT DESCRIPTION

The inverter INV222 includes the newest switching technology with digital control. Due to this fact a dramatic reduction of volume and weight was achieved.

With a state-of-the-art control solution it provides an excellent functionality and several protection features.

The inverter is able to run in parallel operation mode to increase the reliability of the AC system without any additional options. Additional modules can be integrated in wired slots during normal system operation. For higher reliability the hard wired synchronization bus between paralleled inverters is working in a redundant mode.

Up to 4 inverters can be installed in a 19"-subrack with only 2U. The module is prepared to operate with the new static switches of the STS series to increase the system availability furthermore.

Modules for three-phase operation available on request.

#### APPLICATIONS

Inverter module for AC power supply facilities with or without battery in all areas of industry, telecommunication, power generation and power distribution.




# TECHNICAL DATA

<b>Type</b>	<b>INV222-48/230-50</b>
Article code	501-022-515.00
Nominal input voltage	48VDC
Nominal input current	41.6ADC @ 48VDC
Input frequency range	DC
Input voltage range	40.8-67.5VDC
Inrush current	≤nominal input current
Overall efficiency	>90%
Internal input fusing	No; external fusing required (63A)
Nominal output voltage	230VAC ±0.5%, adjustment range: 200-242VAC; parallel mode: 230VAC ±5%
Nominal output current	9.8AAC @ cos phi=0.8; 7.8AAC @ cos phi=1 (resistive power)
Nominal output power	1800W/2250VA @ cos phi=0.8
Overload capability	130% for 10 sec
Output frequency	50Hz ±0.01Hz
Synchronization range	48-52Hz/58-62Hz (60Hz optional)
Static regulating deviation	±0.5%
Dynamic accuracy of the output voltage	<3% Vnom at load variations between 10%-90%-10% Inom; transient time ≤0.3ms
Short circuit protection	Continuous short circuit proof; 3x Inom for 3 sec
Parallel operation	Yes, ≤10 modules; current sharing ≤10% Inom; inclined output voltage characteristic
THD/Crest factor	≤2% at linear load/≤3
Power factor range	0.5 ind. - 1 - 0.5 cap.
External output fuse	10A gL or MCB characteristic B
LED signalling	Operation (green), Vo OK (green), Alarm (red)
Main processor	16Bit Fujitsu
Electronic protection	Input under voltage, input over voltage, over temperature, overload and short circuit protection
External synchronization	Parallel operation; no fixed master; external synchronization by static transfer switch
Isolated signalling contacts	"General fault"; relay contact NO; 60V/0.1A
Communications interface	CAN-Bus, proprietary protocol
Ambient temperature	Operation: -20C to +55°C (power derating 2%/K above +40°C); storage: -40°C to +85°C
Cooling	Fan cooling (temperature-controlled; monitored)
Climatic conditions	According to IEC 721-3-3 class 3K3/3Z1/3B1/3C2/3S2/3M2
Max. installation altitude	≤ 1500m
Audible noise	<45dBA
Type of construction	1/4 x 19", 2U
Dimensions (W/H/D)	106.4/88.4/335mm
Weight	Approx. 3.5kg
Type of enclosure / Protection class	IP20 (front panel) / 1
Color	Front panel: RAL 7035, print: neutral, black RAL 9005
CE conformity	Yes
Compliance to safety standards	EN60950-1; VDE0100 T410; VDE0110; EN50178; EN60146
Compliance to EMC standards	EN55011/22 class "B"; EN61000-4 T2-5
Connections	DC input, AC output and signalization: DIN41612-M connector

## OPTIONS

## DIMENSIONS

Article code / Designation	View
502-222-315.LV  Assembly set 19" sub rack 2U incl. backplane for 3pcs. inverters INV2xx and 1pc. static switch STS207	
502-222-405.LV  Assembly set 19" sub rack 2U incl. backplane for 4pcs. inverters INV2xx	
601-070-515.00  Static bypass switch STS207 LV	
INV222 inverter modules for three-phase operation available on request.	

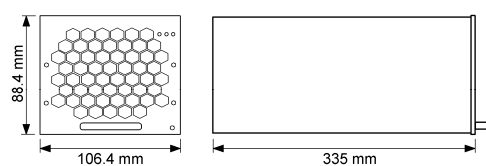

DS\_INV222\_48V\_E\_R07 - Subject to change without notice - Eltek Valere Deutschland GmbH

**Eltek Valere Deutschland GmbH**  
Schillerstrasse 16  
D-32052 Herford  
Tel: +49 52 21 17 08 200  
info.industrial@eltekvalere.com  
www.eltekvalere.com

**Finland**  
Eltek Energy Oy  
Tel: +35 820 779 88 20  
**France**  
Eltek - SFEE SA  
Tel: +33 562 340 930  
**Germany**  
Eltek Valere Industrial GmbH  
Tel: +49 52 21 17 08 200  
Eltek Valere Deutschl. GmbH  
Tel: +49 694 2002 0

**Norway**  
Eltek Valere AS  
Tel: +47 32 20 32 00  
**Poland**  
Eltek Polska Sp. Z o.o.  
Tel: +48 914 852 440  
**Russia**  
OOO Eltek St. Petersburg  
Tel: +78 123 321 117  
**Slovakia**  
Eltek Energy Slovakia s.r.o.  
Tel: +42 144 520 1607

**Spain**  
Eltek Energia S.A.  
Tel: +34 914 920 660  
**Sweden**  
Eltek Energy AB  
Tel: +46 862 664 20  
Alab DC Systems AB  
Tel: +46 54 68 81 50  
**United Kingdom**  
Eltek Energy (UK) Ltd  
Tel: +44 144 22 193 55

**Australia**  
Eltek Pacific Pty Ltd  
Tel: +61 294 794 200  
**Bangladesh**  
Eltek Energy Pte Ltd  
Tel: +88 017 2097 097  
**India**  
Eltek SGS Pvt Ltd  
Tel: +91 124 221 00 18  
**Malaysia**  
Eltek Energy (M)Sdn Bhd  
Tel: +60 179 815 866/74 552

**Pakistan**  
Eltek Energy AS Pakistan  
Tel: +97 148 871 176  
**Philippines**  
Eltek Energy Incorporated  
Tel: +63 291 063 55  
**Singapore**  
Eltek Energy Pte Ltd  
Tel: +65 773 23 26  
**Thailand**  
Eltek Energy Incorp 2005 Ltd  
Tel: +66 294 369 05

**UAE**  
Eltek Middle East  
Tel: +97 148 871 176  
**China**  
Eltek Energy Technology Ltd  
Tel: +86 769 226 511 08  
**Hong Kong**  
Eltek Energy Ltd  
Tel: +85 228 982 689  
**Brazil**  
Eltek Sistemas de Energia  
Tel: +55 116 487 56 56

**Colombia**  
Eltek Energy LLC  
Tel: +57 162 216 91  
**USA**  
Eltek Energy LLC  
Tel: +18 154 599 100  
**Mexico**  
Eltek Energy International  
Tel: +52 55 53 74 1842  
**Peru**  
Eltek Energy de Peru SRL  
Tel: +51 142 192 71